


SOAP DISPENSER

LIQUID & FOAMING

- ·Sink-mounted soap dispenser
- ·Push-button actuated.
- ·Model suitable for collectivities and for installation in areas with high traffic of people.
- ·Suitable for liquid and lotion soaps, synthetic detergents and antibacterial soaps containing PCMX and/or Triclosan. Not supported surgical soaps.




- ·Chrome brass piston, spout, and escutcheon
- ·Vandal-resistant polyethylene tank.
- ·Fixed push-button.
- ·Removable valve for refilling in the upper part.
- ·Suitable for chlorine-free hand soap with neutral PH.

Reference: 13.141	capacity: 0.35L
Reference: 13.142	capacity: 1.0L

TECHNICAL SPECIFICATIONS

·Pressure pulsation	26,0 N
·Quantity dispensed per pum	p 1ml
·Escutcheon	Ø42mm (13.141)
·Countertop hole	Ø24.5 mm (13.141)
·Tank height	155 mm (13.141)
·Weight(empty)	0.24kg (13.141)
·Escutcheon	Ø51 mm (13.142)
·Countertop hole	Ø22 mm (13.142)
·Tank height	240 mm (13.142)
·Weight(empty)	0.6 kg (13.142)



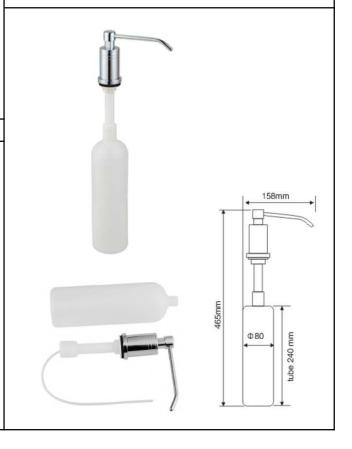

Tel: +86 571 888 685 70 hotec@cnhotec.com

Fax: +86 571 888 685 71 www.cnhotec.com